


1  Please read the entire owner's manual before putting the vehicle into operation for the first time!
Lire attentivement l'ensemble du manuel d'utilisation avant de mettre le véhicule en service!
A600.07.098.100

2 **801 HQV** A676.03.098.000

Fuel: RON 95 unleaded (USA = PREMIUM PON 91)
Tyre front: 120/70 ZR17 M/C (58W)
Air pressure front: rider only 2.3 bar (33 psi)
max. payload 2.3 bar (33 psi)
Tyre rear: 180/55 ZR17 M/C (73W)
Air pressure rear: rider only 2.6 bar (38 psi)
max. payload 2.6 bar (38 psi)
Max payload: 165kg (363lbs)
Max. total weight: 435kg (959lbs)
Engine oil: fully synthetic 10W50 (5W/40 under 0°C, 32°F)

Further information see owner's manual

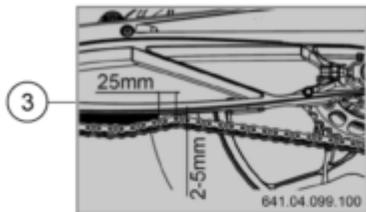

4  MANUFACTURED BY/FABRIQUE PAR: KTM

MODEL / MODELE	YEAR / ANNÉE	TYPE / TYPE	MS / MS	MAX. SPEED / VITESSE MAX.
801 HQV	2025	Motorcycle	165 kg	180 km/h

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON THE DATE OF MANUFACTURE. CE VÉHICULE EST CONFORME À TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU RÈGLEMENT SUR LA SÉCURITÉ DES VÉHICULES AUTOMOBILES DU CANADA EN VIGUEUR À LA DATE DE SA FABRICATION.

5 **MOTORCYCLE NOISE EMISSION CONTROL INFORMATION**
KTM 801 HQV


THIS XXXX XXXXXXXXXX MOTORCYCLE XXX XX XXX XXX MEETS EPA NOISE EMISSION REQUIREMENTS OF XX JBA AT XXXX RPM BY THE FEDERAL TEST PROCEDURE. MODIFICATIONS WHICH CAUSE THIS MOTORCYCLE TO EXCEED FEDERAL NOISE STANDARDS ARE PROHIBITED BY U.S. FEDERAL LAW. SEE OWNER'S MANUAL.

Motorcycle Type: XXXXXXXXXX

6 

8 **801 Vitpilén / Svartpilen** FORK SHOCK

SETTING look Owner's manual	FORK		SHOCK	
	Compression	Rebound	Rebound	Preload Adjuster (Rear)
Standard	3	3	3	3
Sport	1	2	2	4
Comfort	4	4	4	3
Pillion & Luggage	3	3	2	6

9 

FUSE NO.	FUSE R/A	DESCRIPTION
FUSE 10A	10A	ABS control unit
FUSE 15A	15A	ABS control unit
FUSE 6 - 10A	10A	ABS control unit
FUSE 6 - 15A	15A	10 sensor, 20C, ACCU, immobilizer
FUSE 7 - 15A	15A	ACC2, USB-Charging, HCU
FUSE 8 - 15A	15A	ACC1
FUSE 9 - 15A	15A	high beam, position, tail, license plate light, low beam
FUSE 1 - 15A	15A	horn, combination instrument, brake light
FUSE 4 - 15A	15A	indicator fans
FUSE 2 - 15A	15A	ignition, ECU, EVAP, 3 sensor, immobilizer, fuel injection
FUSE 3 - 15A	15A	ignition, combination instrument, alarm system (optional), ECU
FUSE 30A	30A	main fuse

main fuse A676.11.087.010

Pos	Part Number	Description	Additional Text	Quantity
1	A60007098100	Fuel tank sticker NA		1.00
2	A67603098000	Technical information sticker		1.00
3	64104099100	Sticker chain tension		1.00
4	LI24-A676-30	Typeplate US/CA KTM		1.00
5	LI25-A676-13	Noise emission label USA		1.00
6	LI25-A676-7			1.00
8	A67603097000	STD setting sticker		1.00
9	A67611087010	Fuse box sticker		1.00