


1 Please read the entire owner's manual before putting the vehicle into operation for the first time!
Lire attentivement l'ensemble du manuel d'utilisation avant de mettre le véhicule en service!
A600.07.098.100

2 **801 HQV** A676.03.098.000

Fuel: RON 95 unleaded (USA = PREMIUM PON 91)
Tyre front: 120/70 ZR17 M/C (58W)
Air pressure front: rider only 2.3 bar (33 psi)
max. payload 2.3 bar (33 psi)
Tyre rear: 180/55 ZR17 M/C (73W)
Air pressure rear: rider only 2.6 bar (38 psi)
max. payload 2.6 bar (38 psi)
Max payload: 165kg (363lbs)
Max. total weight: 435kg (959lbs)
Engine oil: fully synthetic 10W50 (5W/40 under 0°C, 32°F)

Further information see owner's manual

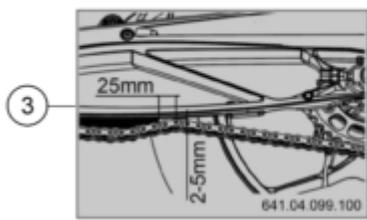

4 MOTORCYCLE NOISE EMISSION CONTROL INFORMATION
KTM AG, Austria
THIS XXXX XXXXXXXXXX MOTORCYCLE XXX.XX.XXX.XXX MEETS EPA NOISE EMISSION REQUIREMENTS OF XX dB(A) AT XXXX RPM BY THE FEDERAL TEST PROCEDURE. MODIFICATIONS WHICH CAUSE THIS MOTORCYCLE TO EXCEED FEDERAL NOISE STANDARDS ARE PROHIBITED BY U.S. FEDERAL LAW. SEE OWNER'S MANUAL.
Motorcycle Type: XXXXXXXXXX

5
MANUFACTURED BY/FABRIQUE PAR: KTM
TYPE: 801 HQV
COLD INFLATION PRESSURE PRESSION DE GONFLAGE À FROID

6
MOTORCYCLE NOISE EMISSION CONTROL INFORMATION
KTM AG, Austria
THIS XXXX XXXXXXXXXX MOTORCYCLE XXX.XX.XXX.XXX MEETS EPA NOISE EMISSION REQUIREMENTS OF XX dB(A) AT XXXX RPM BY THE FEDERAL TEST PROCEDURE. MODIFICATIONS WHICH CAUSE THIS MOTORCYCLE TO EXCEED FEDERAL NOISE STANDARDS ARE PROHIBITED BY U.S. FEDERAL LAW. SEE OWNER'S MANUAL.
Motorcycle Type: XXXXXXXXXX

8 **801 Vitpilen / Svartpilen FORK SHOCK**

SETTING look owner's manual	FORK		SHOCK	
	Compression	Rebound	Rebound	Preload Adjuster (lb/in)
Standard	3	3	3	3
Sport	1	2	2	4
Comfort	4	4	4	3
Pillion & Luggage	3	3	2	6

9
FUSE 7.5A ABS control unit
FUSE 6A ABS control unit
FUSE 6 - 15A ABS control unit, 10 sensor, DMC, ECU, immobiliser
FUSE 6 - 15A ACC2, USB-Charging, HCU
FUSE 7 - 15A ACC1
FUSE 6 - 15A high beam, position, tail, license plate light, low beam
FUSE 5 - 15A horn, combination instrument, brake light
FUSE 4 - 15A indicator fans
FUSE 2 - 15A ignition, ECU, EVAP, 4 sensor, immobiliser, fuel injection
FUSE 1 - 15A ignition, combination instrument, alarm system (optional), ECU
main fuse A676.11.087.010

Pos	Part Number	Description	Additional Text	Quantity
1	A60007098100	Fuel tank sticker NA		1.00
2	A67603098000	Technical information sticker		1.00
3	64104099100	Sticker chain tension		1.00
4	LI25-A676-13A	Noise emission label USA		1.00
5	LI24-A676-30	Typeplate US/CA KTM		1.00
6	LI25-A676-7A	Emission control information 5		1.00
8	A67603097000	STD setting sticker		1.00
9	A67611087010	Fuse box sticker		1.00